



CX 2017

Composition

Woven of 60% polyolefin yarn and 40% polyethylene

Width

137 cm / 54 inches

Length

50 m / 55 yards

Weight

300 gr/m², 13 oz/yd

Backing Options

unbacked / acrylic / non-woven available

Performance

Flame retardancy:

ASTM E-84, class A

EN 13501, class B-s1, d0

GB 8624-2012, class B1

Composition safety:

HJ 2502-2010, not detected, pass

ISO 17226-1:2008, not detected, pass

CPSC-CH-E1002-08.3, not detected, pass



Physical performance:

ISO 105-B02:2014, light fastness, grade 4


ISO 12947-2: Martindale abrasion resistance >100,000 rubs

Installation

Using the correct adhesives and accessories, the material is suggested to wrap over panels, or apply directly to the wall surface. For direct-to-wall installation, overlap of 1" of two strips and cut in middle is suggested for butt treatment.

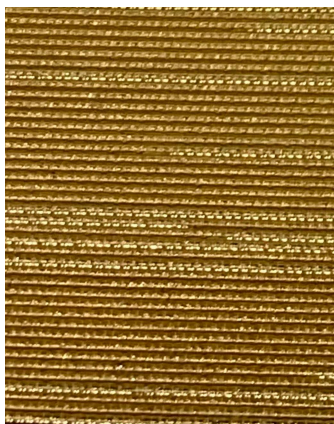


CX 2017-1




CX 2017-2




CX 2017-3




CX 2017-4




CX 2017-5




CX 2017-6



CX 2017-7



CX 2017-8



CX 2017-9



CX 2017-11



CX 2017-13



CX 2017-14



CX 2017-15