



CX 2018

Composition
 Woven of 100% genuine linen yarns

Width
 137 cm / 54 inches

Length
 50 m / 55 yards

Weight
 300 gr/m², 13 oz/yd

Backing Options
 unbacked / acrylic / non-woven available

Performance
Flame retardancy:
 ASTM E-84, class A
 EN 13501, class B-s1, d0
 GB 8624-2012, class B1


Composition safety:
 HJ 2502-2010, not detected, pass
 ISO 17226-1:2008, not detected, pass
 CPSC-CH-E1002-08.3, not detected, pass

Physical performance:
 ISO 105-B02:2014, light fastness, grade 4
 ISO 12947-2: Martindale abrasion resistance >100,000 rubs

Installation
 Using the correct adhesives and accessories, the material is suggested to wrap over panels, or apply directly to the wall surface. For direct-to-wall installation, overlap of 1" of two strips and cut in middle is suggested for butt treatment.



CX 2018-1 CX 2018-2 CX 2018-3 CX 2018-4 CX 2018-5

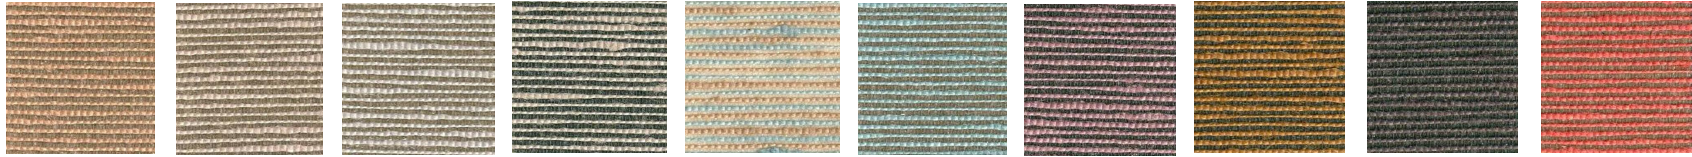

CX 2018-6 CX 2018-7 CX 2018-8 CX 2018-9 CX 2018-10 CX 2018-11 CX 2018-12 CX 2018-13 CX 2018-14 CX 2018-15