



CANVAS

Applied Color
VWC6-040

Composition
vinyl coating on woven cotton backing

Width
132 - 137 cm , 52 - 54 inches

Length
30 meters per roll

Weight
450 gr/m² , 20 oz/yd

Performance
Flame retardancy:
ASTM E-84, class A
EN 13501, class B-s1, d0
BS 476-7, class 2
GB 8624-2012, class B1

Composition safety:
CDPH 01350, low VOC compliant
GB 18585-2001, pass
JIS Z 2801:2010 applicable

Physical performance:
ASTM D4060-25, abrasion resistance
ASTM D2261-13, wet tear strength
ASTM D5034-21, grab tensile strength

Installation
Suggested to apply primer sealer and SL 001 glue combination to install. Overlap of 1" of two strips and cut in middle is suggested for butt treatment. Installation advice supplied with every roll.

Variation
There can be a variation between sample material and finished product. Stock cuttings are available for color approval.



CANVAS

VWC6-039



VWC6-040




VWC6-041




VWC6-042




VWC6-043

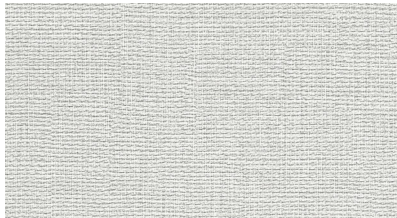


VWC6-044

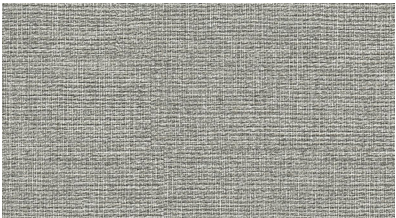

VWC6-045

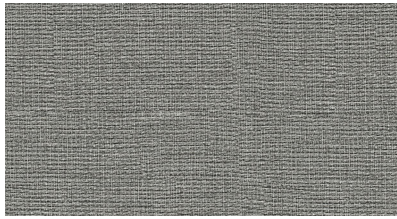

VWC6-046

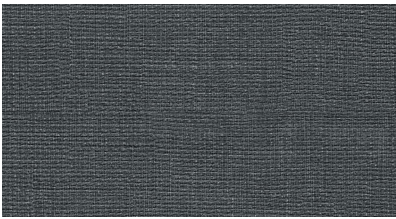

VWC6-047

