



CASCADE

Applied Color
VWC5-022

Composition
vinyl coating on woven cotton backing

Width
132 - 137 cm , 52 - 54 inches

Length
30 meters per roll

Weight
450 gr/m² , 20 oz/yd

Performance
Flame retardancy:
ASTM E-84, class A
EN 13501, class B-s1, d0
BS 476-7, class 2
GB 8624-2012, class B1

Composition safety:
CDPH 01350, low VOC compliant
GB 18585-2001, pass
JIS Z 2801:2010 applicable

Physical performance:
ASTM D4060-25, abrasion resistance
ASTM D2261-13, wet tear strength
ASTM D5034-21, grab tensile strength

Installation
Suggested to apply primer sealer and SL 001 glue combination to install. Overlap of 1" of two strips and cut in middle is suggested for butt treatment. Installation advice supplied with every roll.

Variation
There can be a variation between sample material and finished product. Stock cuttings are available for color approval.

VWC5-022

CASCADE

VWC5-018



VWC5-019



VWC5-020




VWC5-021



VWC5-022




VWC5-023

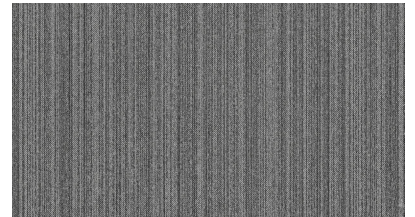

VWC5-024



VWC5-025

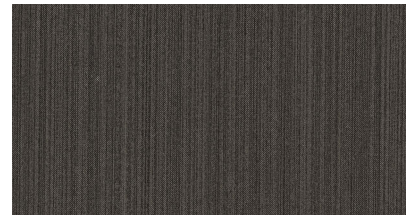

VWC5-026



VWC5-027

