



DRIFT

Applied Color
VWC6-031

Composition
vinyl coating on woven cotton backing

Width
132 - 137 cm , 52 - 54 inches

Length
30 meters per roll

Weight
450 gr/m² , 20 oz/yd

Performance
Flame retardancy:
ASTM E-84, class A
EN 13501, class B-s1, d0
BS 476-7, class 2
GB 8624-2012, class B1

Composition safety:
CDPH 01350, low VOC compliant
GB 18585-2001, pass
JIS Z 2801:2010 applicable

Physical performance:
ASTM D4060-25, abrasion resistance
ASTM D2261-13, wet tear strength
ASTM D5034-21, grab tensile strength

Installation
Suggested to apply primer sealer and SL 001 glue combination to install. Overlap of 1" of two strips and cut in middle is suggested for butt treatment. Installation advice supplied with every roll.


Variation
There can be a variation between sample material and finished product. Stock cuttings are available for color approval.

VWC6-031



DRIFT


VWC6-030

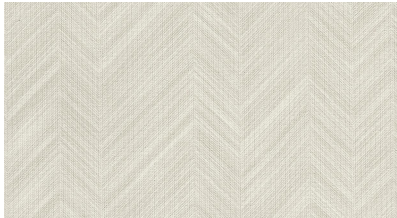


VWC6-031




VWC6-032

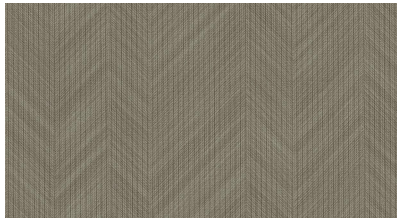

VWC6-033

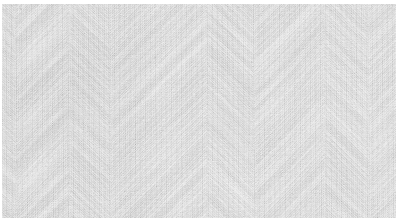


VWC6-034

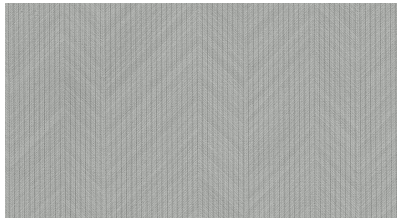


VWC6-035



VWC6-036

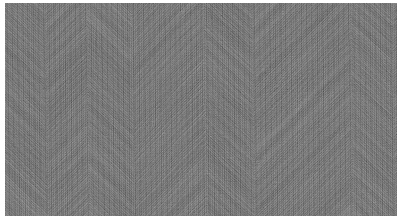

VWC6-037

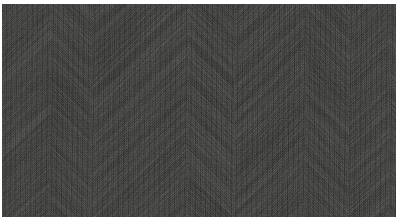

VWC6-038

