



LISLE

Applied Color
YA223004

Composition
vinyl coating on woven cotton backing

Width
132 - 137 cm , 52 - 54 inches

Length
30 yards per roll

Weight
340 gr/m², 15 oz/yd


Performance
Flame retardancy:
ASTM E-84, class A
EN 13501, class B-s1, d0
BS 476-7, class 2
GB 8624-2012, class B1

Composition safety:
CDPH 01350, low VOC compliant
GB 18585-2001, pass
JIS Z 2801:2010 applicable

Physical performance:
ASTM D4060-25, abrasion resistance
ASTM D2261-13, wet tear strength
ASTM D5034-21, grab tensile strength

Installation
Suggested to apply primer sealer and SL 001
glue combination to install. Overlap of 1" of two
strips and cut in middle is suggested for butt
treatment. Installation advice supplied with
every roll.

Variation
There can be a variation between sample
material and finished product. Stock cuttings
are available for color approval.

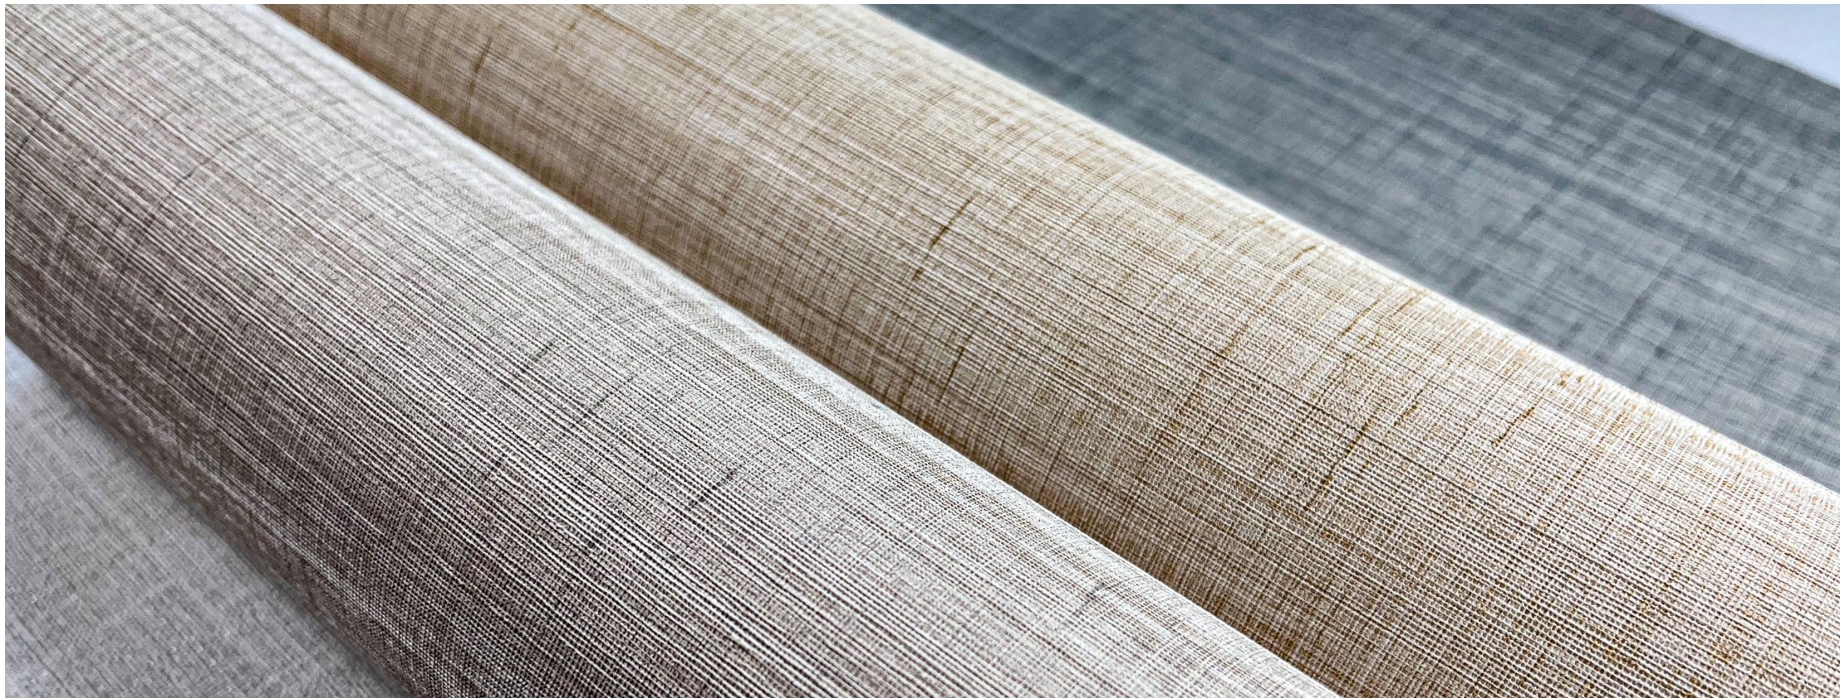

LISLE

YA223001



YA223002




YA223003



YA223004



YA223005

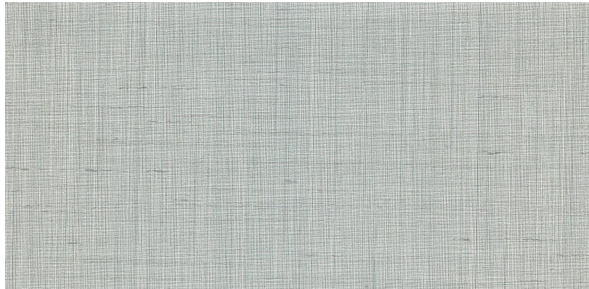

YA223006

