

NEXUS

Applied Color
VWC5-047

Composition
vinyl coating on woven cotton backing

Width
132 - 137 cm , 52 - 54 inches

Length
30 meters per roll

Weight
450 gr/m², 20 oz/yd

Performance
Flame retardancy:
ASTM E-84, class A
EN 13501, class B-s1, d0
BS 476-7, class 2
GB 8624-2012, class B1

Composition safety:
CDPH 01350, low VOC compliant
GB 18585-2001, pass
JIS Z 2801:2010 applicable

Physical performance:
ASTM D4060-25, abrasion resistance
ASTM D2261-13, wet tear strength
ASTM D5034-21, grab tensile strength


Installation
Suggested to apply primer sealer and SL 001 glue combination to install. Overlap of 1" of two strips and cut in middle is suggested for butt treatment. Installation advice supplied with every roll.

Variation
There can be a variation between sample material and finished product. Stock cuttings are available for color approval.




NEXUS

VWC5-037

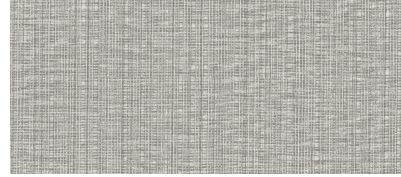


VWC5-038

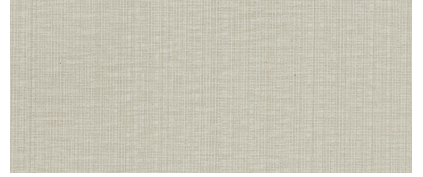

VWC5-039



VWC5-040

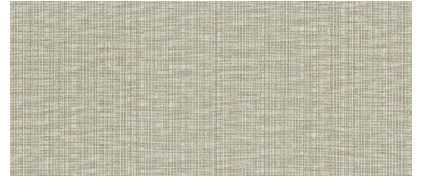


VWC5-041



VWC5-042




VWC5-043

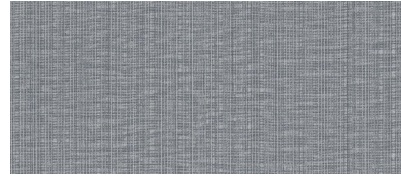


VWC5-044



VWC5-045

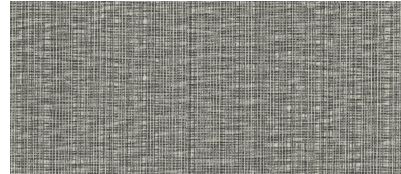

VWC5-046

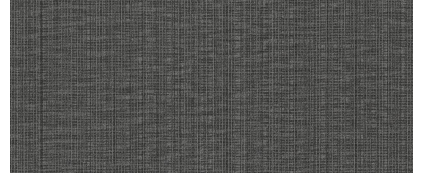

VWC5-047



VWC5-048

