



VWC6-025

ORBIT

Applied Color
VWC6-025

Composition
vinyl coating on woven cotton backing

Width
132 - 137 cm , 52 - 54 inches

Length
30 meters per roll

Weight
450 gr/m², 20 oz/yd

Performance
Flame retardancy:
ASTM E-84, class A
EN 13501, class B-s1, d0
BS 476-7, class 2
GB 8624-2012, class B1

Composition safety:
CDPH 01350, low VOC compliant
GB 18585-2001, pass
JIS Z 2801:2010 applicable

Physical performance:
ASTM D4060-25, abrasion resistance
ASTM D2261-13, wet tear strength
ASTM D5034-21, grab tensile strength


Installation
Suggested to apply primer sealer and SL 001 glue combination to install. Overlap of 1" of two strips and cut in middle is suggested for butt treatment. Installation advice supplied with every roll.

Variation
There can be a variation between sample material and finished product. Stock cuttings are available for color approval.




ORBIT


VWC6-023

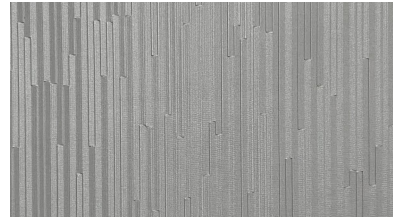


VWC6-024

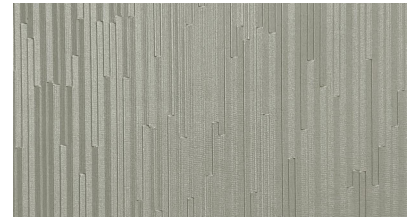

VWC6-025

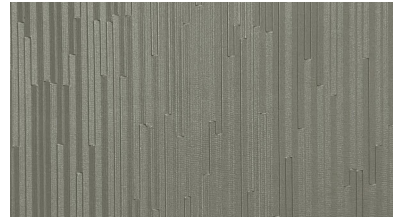


VWC6-026

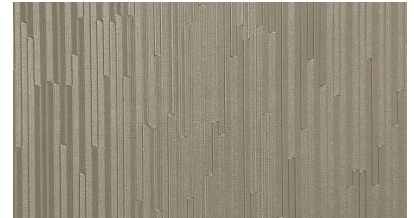

VWC6-027



VWC6-028

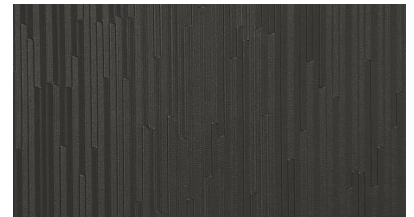

VWC6-029

