

SERENITY

Applied Color
VWC6-015

Composition
vinyl coating on woven cotton backing

Width
132 - 137 cm , 52 - 54 inches

Length
30 meters per roll

Weight
450 gr/m², 20 oz/yd

Performance
Flame retardancy:
ASTM E-84, class A
EN 13501, class B-s1, d0
BS 476-7, class 2
GB 8624-2012, class B1

Composition safety:
CDPH 01350, low VOC compliant
GB 18585-2001, pass
JIS Z 2801:2010 applicable

Physical performance:
ASTM D4060-25, abrasion resistance
ASTM D2261-13, wet tear strength
ASTM D5034-21, grab tensile strength

Installation
Suggested to apply primer sealer and SL 001
glue combination to install. Overlap of 1" of two
strips and cut in middle is suggested for butt
treatment. Installation advice supplied with
every roll.

Variation
There can be a variation between sample
material and finished product. Stock cuttings
are available for color approval.



VWC6-015




SERENITY

VWC6-010



VWC6-011

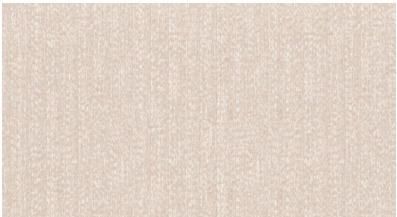


VWC6-012



VWC6-013



VWC6-014

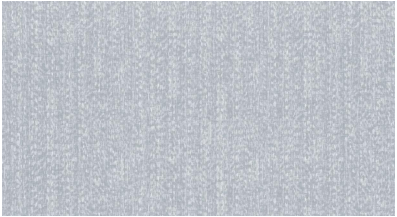

VWC6-015



VWC6-016

